


Particleboard Core

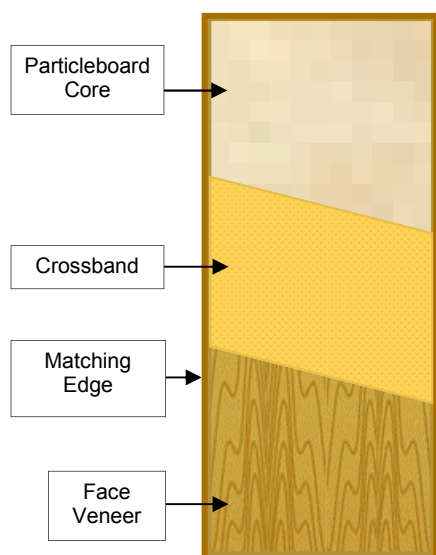

- Non Rated
- Fire Rated 20 Minute

STREK•O
A great name in doors since 1940

Product Features

Construction:	Bonded 5 Ply Hot Press		
Core:	Bonded Particleboard Core (conforming to ANSI A 208.1 1 LD-2)		
Door Thickness:	Non-rated	1 3/4", 1 3/8", 2 1/4" (other options avail.)	
	20 Minute	1 3/4", 1 3/8" - (3/0 x 7/0 max), 2 1/4"	
Maximum Size:	Single (non-rated)	4/0 x 10/0	4/0 x 10/0
	Pair (non-rated)	8/0 x 10/0	8/0 x 10/0
		<u>Neutral Pressure</u>	<u>Positive Pressure</u>
	Single (20 minute)	4/0 x 10/0	4/0 x 10/0
	Pair (20 minute)	8/0 x 10/0	8/0 x 9/0
	Double Egress Pair (20 minute)	8/0 x 8/0	8/0 x 9/0
Stiles:	1 3/8" prior to factory trimming; glued to the core (other options available)		
Top & Bottom Rails:	1 1/2" Mill Option (Wider rails available)		
Faces:	All Veneer Species, Medium Density Overlay (MDO)		
Veneer Matching:	Available in Pairs, Sets, & Transoms (special matching available)		
Crossbands:	High Density Fiberboard (HDF)		
Adhesives:	Type 1 (Waterproof)		
Max Lite Openings:	<u>Non-rated:</u> Total sq. in. not to exceed 1296. Lite opening dimensions not to exceed 38" in width and 54" in length.		
	<u>20 Minute:</u> (Requires approved glass) Total sq. in. not to exceed 1296. Lite opening dimensions not to exceed 30" in width and 54" in length. (1 3/8" thick not to exceed 100 total sq in.)		
Machining/Finishing:	Prefit, Bevel, & complete Factory Machining and Factory UV Finishing available		
Warranty:	Life of Original Installation - <i>Warranty does not apply for exterior applications</i>		
Specifications:	Meets WDMA & AWI quality standards (Contact sales for label approvals)		
Environmental/LEED Options:	MR4-Recycled Content/MR5-Regional Materials/MR6-Rapidly Renewable Materials/MR7-Certified Wood/IEQ4.4-Low-Emitting Materials (No added Urea Formaldehyde Resins)		